

Customer

Supplier

Company name
Editor
Phone number
E-mail

Fields of Application

Water supply and booster stations
Irrigation, overhead irrigation and draining
Filling and emptying of tanks and containers
Circulating of hot and cold water in HVAC systems
Pumping of condensate
Water circulating for swimming pools
Sanitary and cleaning installations
For industrial applications and public services
Fresh water supply on ships

Design Specification

NMM series pumps are volute casing, single stage, end suction, monoblock type centrifugal pumps with closed impeller and mechanical seal.

Main dimensions and the nominal flow rates of the pumps comply with the DIN 24255 and EN 733 standards.

Single entry, closed impeller is hydraulically thrust compensated and dynamically balanced.

Pump and motor are separate components. Motor shaft is passed into the pump shaft for coupling. After a certain motor power, a coupling system is used between the motor shaft and pump shaft.

Maintenance is very much easier, the impeller shaft and other rotating parts being removable with no need to disconnect the suction and delivery pipes, due to back pull-out design.

Maximum interchangeability of components, identical parts can be used along various pumps of the NMM series, which greatly simplifies and reduces stock of spare parts in addition to reduced delivery times.

Single-stage centrifugal pump coupled by means of a support, to a standard asynchronous motor, closed type, with external ventilation.

NMM series are fitted with mechanical shaft seal and pump shaft is supported by motor bearings.

Technical Data

Suction Flange	: DN50 - DN150
Discharge Flange	: DN32 - DN125
Operating Pressure	: 10 bar
Temperature Range	: Up to 120 °C
Speed Range	: 1450 - 3500 rpm
Flow Range	: 5 - 400 m³/h
Head Range	: 4 - 105 m



Customer
Supplier

Company name
Editor
Phone number
E-mail

Operating data specification

Pumped fluid	Water	Rated flow	m ³ /h
Solids		Rated head	m
Kind		Geodetic head	m
Percentage of solid content	0	Available system NPSH	m
pH value		Inlet pressure (pin)	0 kPa
Temperature	20 °C	Altitude above sea level	100 m
Density	998.3 kg/m ³	Max. operating pressure	985 kPa
Kin. viscosity	1.005 mm ² /s	Max. diff. pressure	985 kPa
Vapour pressure	2.34 kPa		

Pump

Make	MAS DAF	Impeller type	
Pump type	NMM 40-250	Impeller construction	
Frame size		Impeller Ø	
Design	End Suction Monoblock Type	Max.	268 mm
Self priming	☒ No	designed	258 mm
Speed	2940 1/min	Min.	188 mm
Stages	1	Flow	
Suction port		Nominal	46.5 m ³ /h
Pressure rating	PN16	Max.	60 m ³ /h
Nominal pipe size	DN65	Min.	0 m ³ /h
Standard	DIN	Head	
Discharge port		Nominal	86.6 m
Pressure rating	PN16	Min.	67.1 m
Nominal pipe size	DN40	Max.	101 m
Standard	DIN	Shut off head	101 m
Shaft power		NPSH3	m
Shaft power P2(Q=max.)	21.8 kW	Efficiency	%

Motor

Make/Type	22 KW-2900 RPM / 160L-C
Specific design	IE3 / 50 Hz / Pole pairs 1
Rated power	22 kW
Electric voltage	3~ 400 V
Speed	2950 1/min
Electric current	38 A
Frame size	160L
Degree of protection	IP 55
Type of protection	
Explosion protection	

Coupling

Make/Type	
Series	
Spacer length	mm
Frame size	

Materials

Pump		Shaft seal	AQ1EGG
Pump Casing	GJL-250 (GG25)	Material code	AQ1EGG
Impeller	GJL-250 (GG25)	Seal face	Carbon graphite antimony impregnated (A)
Shaft	A 276 Type 420 (X20Cr13)	Seat	Silicon carbide (Q1, eSiC-Q7)
		Elastomer	EPDM (E)
		Metal parts	CrNiMo steel (G)

Customer

Supplier

Company name
Editor
Phone number
E-mail


Power data referred to:

Water; 20°C; 998.3kg/m³; 1.005mm²/s

Sense of rotation

Clockwise from the drive end

Missing or invalid parameter (REFDIAM)

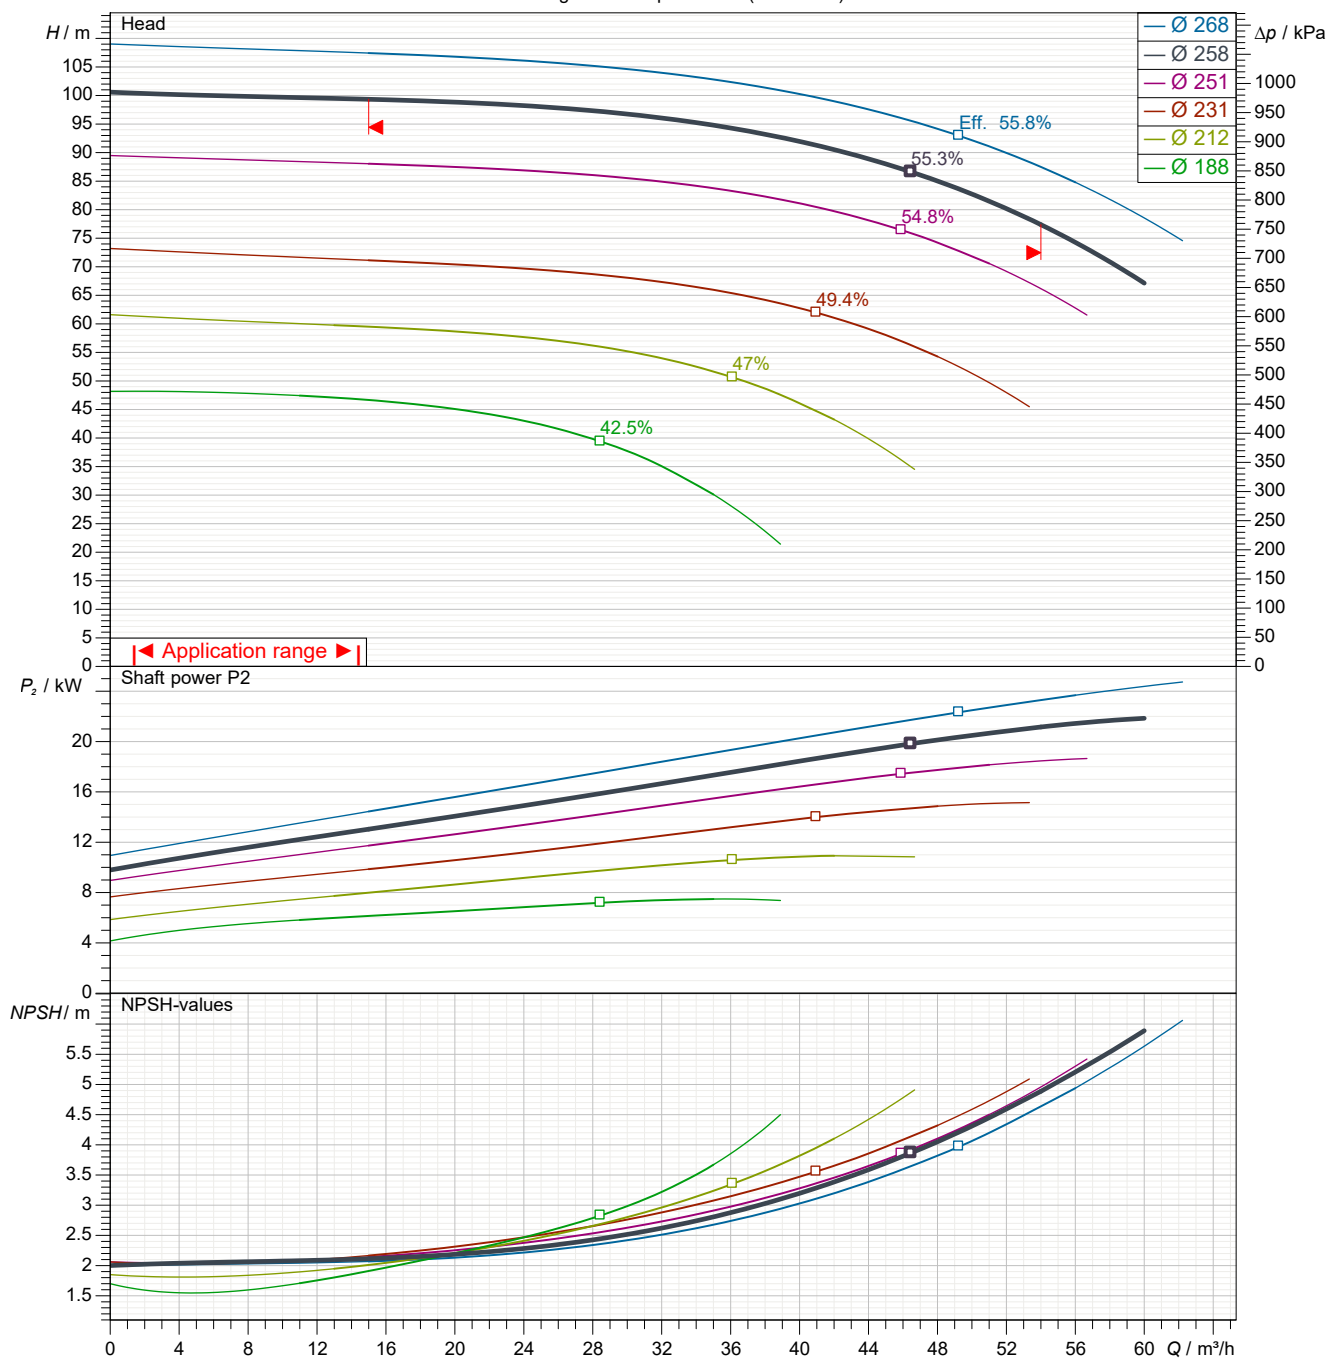

Pump curves in accordance with ISO 9906 2B

Pumped fluid	Water		Rated flow	m³/h
Temperature	20	°C	Rated head	m
Density	998.3	kg/m³	Shaft power	kW
Kin. viscosity	1.005	mm²/s	Speed	2940 1/min
Vapour pressure	2.34	kPa	NPSH3	m
Impeller Ø	258	mm	Efficiency	%

Subject to change

Projec

Issue date

2022-04-07

Last update


2022-04-07

Customer

Supplier

Company name
Editor
Phone number
E-mail

Performance curves

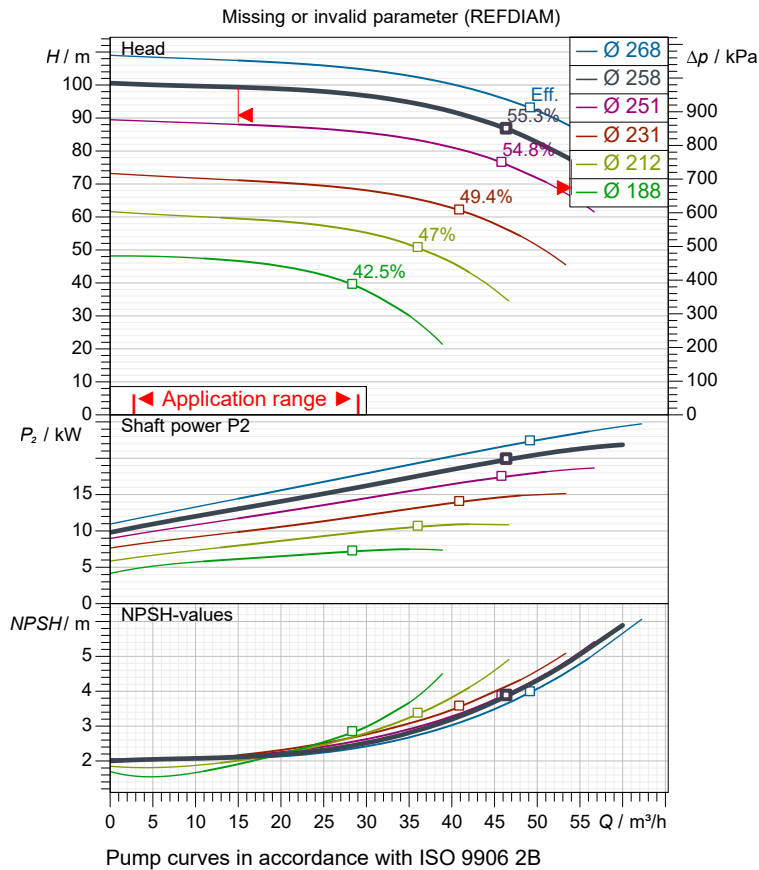

Pump

Make	MAS DAF
Pump type	NMM 40-250
Design	End Suction Monoblock Type
Suction port	
Pressure rating	PN16
Nominal pipe size	DN65
Standard	DIN
Discharge port	
Pressure rating	PN16
Nominal pipe size	DN40
Standard	DIN

Operating data specification

Pumped fluid	Water
Temperature	20 °C
Density	998.3 kg/m ³
Kin. viscosity	1.005 mm ² /s
Vapour pressure	2.34 kPa
Rated flow	m ³ /h
Rated head	m
Shaft power	kW
Speed	2940 1/min
NPSH3	m
Efficiency	%
Impeller Ø	258 mm


Motor

Make/Type	22 KW-2900 RPM / 160L-C
Specific design	IE3 / 50 Hz / Pole pairs 1
Rated power	22 kW
Speed	2950 1/min
Electric voltage	3~ 400 V
Electric current	38 A
Degree of protection	IP 55

Materials

Shaft seal	AQ1EGG
Material code	AQ1EGG
Seal face	Carbon graphite antimony impregnated (A)
Seat	Silicon carbide (Q1, eSiC-Q7)
Elastomer	EPDM (E)
Metal parts	CrNiMo steel (G)

Pump Casing	GJL-250 (GG25)
Impeller	GJL-250 (GG25)
Shaft	A 276 Type 420 (X20Cr13)

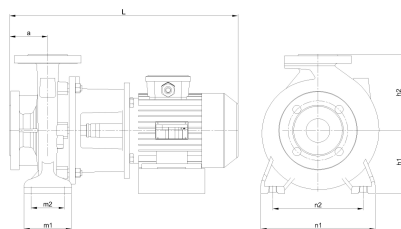


Dimensions	mm
a	100
h1	180
h2	225
L	864
m1	125
m2	95
n1	320
n2	250

Customer

Supplier

Company name
Editor
Phone number
E-mail

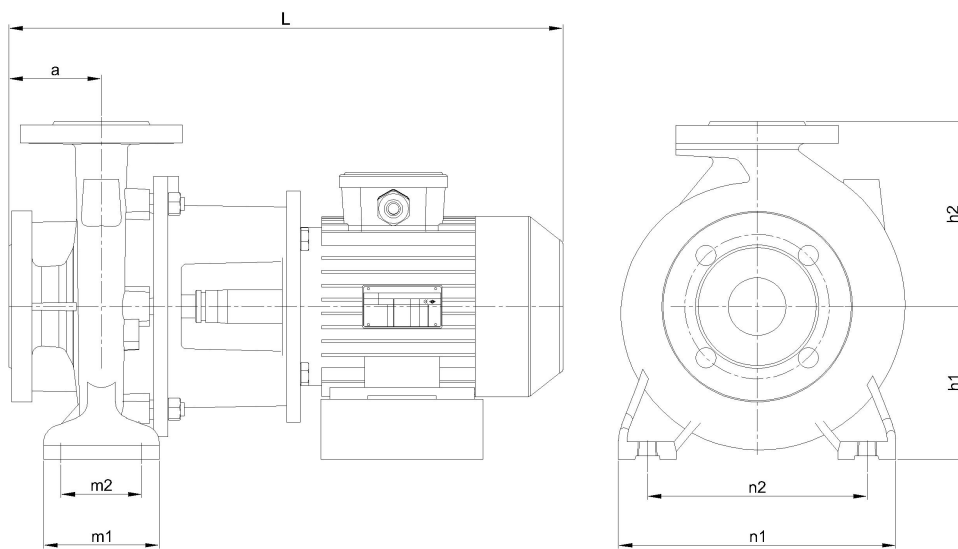

Dimensions

mm

a	100
h1	180
h2	225
L	864
m1	125
m2	95
n1	320
n2	250

Inlet / outlet

Suction port
DN65
PN16


Discharge port
DN40
PN16

Customer

Supplier

Company name
Editor
Phone number
E-mail

motor data

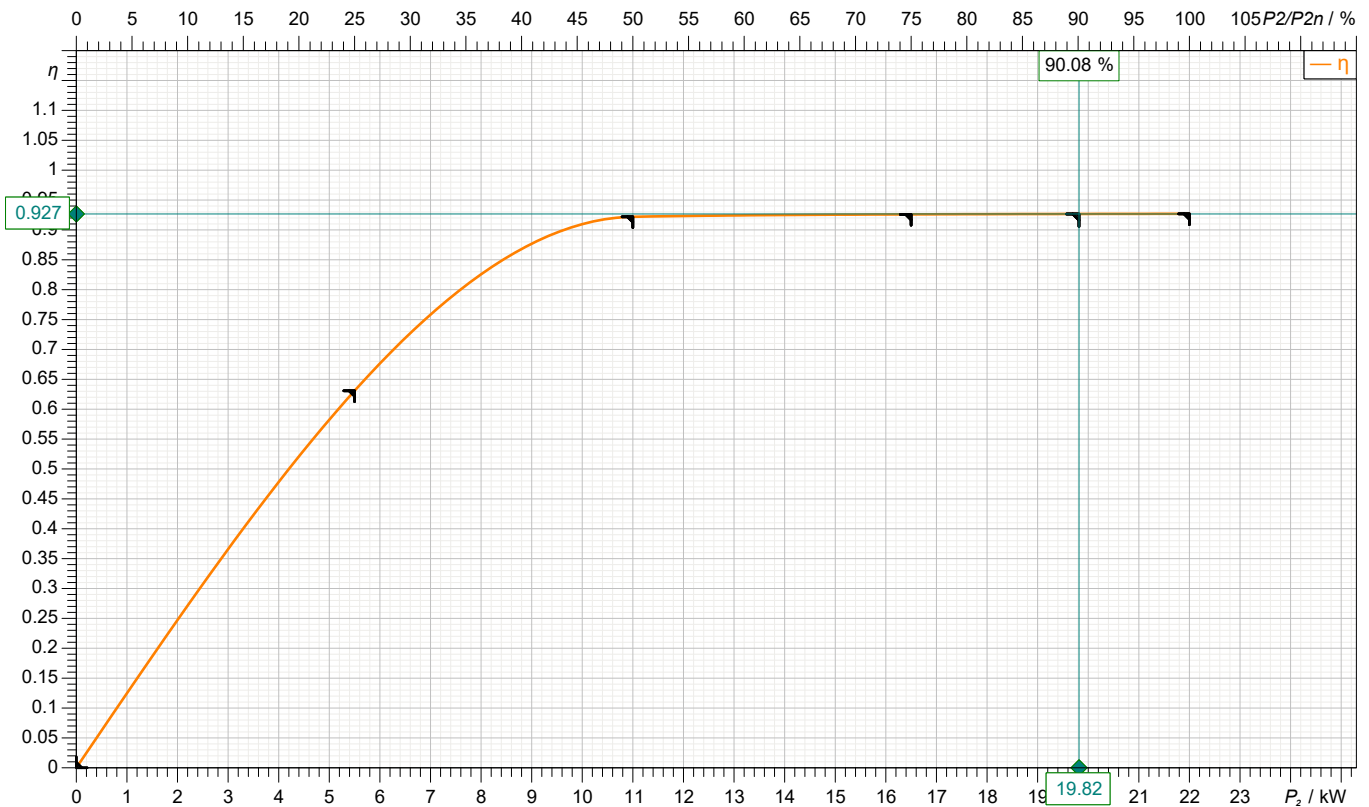

Symbol	No load	25 %	50 %	75 %	100 %	125 %
P_2 / kW	0	5.5	11	16.5	22	
P_1 / kW		8.717	11.93	17.82	23.73	
η / %	0	63.09	92.2	92.6	92.7	


Motor

Make/Type	22 KW-2900 RPM / 160L-C	Degree of protection	IP 55
Specific design	IE3 / 50 Hz / Pole pairs 1	Type of protection	
Rated power	22 kW	Explosion protection	
Electric voltage	3~ 400 V	Service factor	1.15
Number of poles	2	Starting current	
Speed	2950 1/min	Starting torque	
Electric current	38 A	Moment of inertia	
Power factor	0.9	No. starts per hour	
Frame size	160L	Rated torque	71.2 Nm
Efficiency class	IE3	Insulation class	F (155C°)

Customer

Supplier

Company name
Editor
Phone number
E-mail

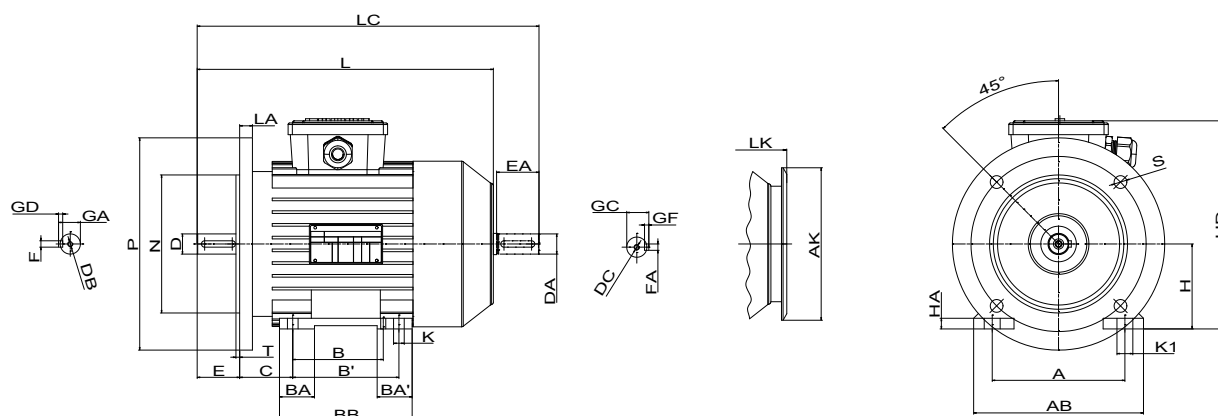

Dimensions



mm

A	254	FxGD	12X9
AB	312	GA	45
AK	303	GC	45
B	-	H	160
B'	62	HA	22
BA	-	HD	380
BA'	304	K	15
C	108	K1	254
D	42	L	600
DA	42	LA	20
DB	M17	LC	716
DC	M17	LK	657
E	110	M	300
EA	110	N	250
FAxGF	12X9	NO	4

Customer

Supplier

Company name
Editor
Phone number
E-mail

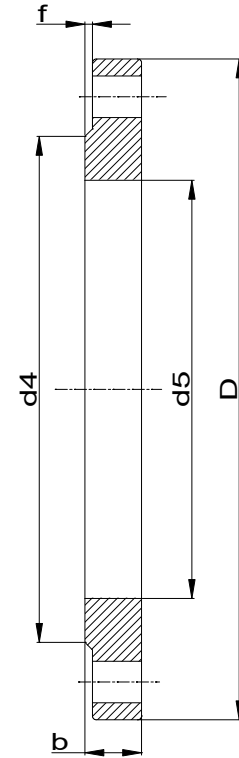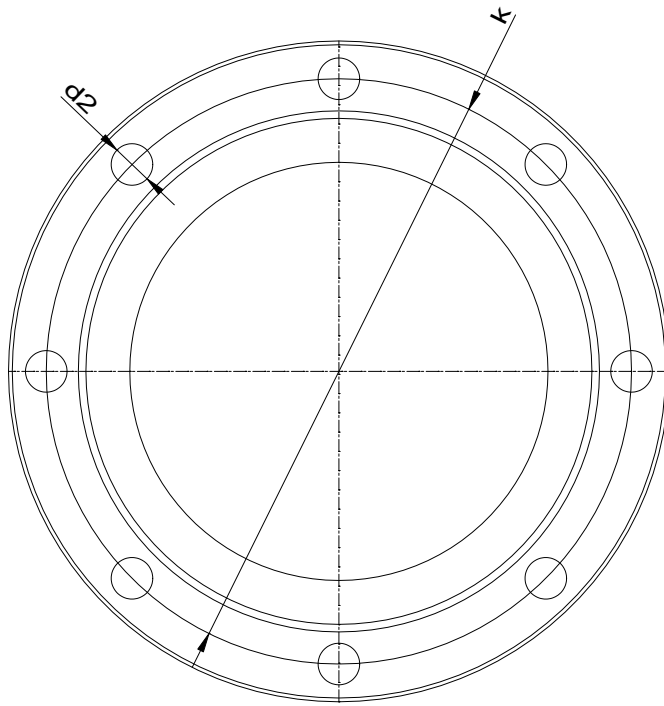

Suction connection

DN65
PN16

Discharge connection

DN40
PN16

Dimensions	mm
b	20
D	185
d2	18
d4	122
d5	77.5
DN	65
f	2
k	145
n	8

Dimensions	mm
b	18
D	150
d2	18
d4	88
d5	49.5
DN	40
f	2
k	110
n	4



Spare part list
NMM 40-250

Revision number

Page
9

Customer

Supplier

Company name
Editor
Phone number
E-mail

Subject to change

Projec

Issue date
2022-04-07

Last update
2022-04-07



Spare part list
NMM 40-250

Revision number

Page
10

Company name
Editor
Phone number
E-mail

Customer

Supplier

Subject to change

Projec

Issue date
2022-04-07

Last update
2022-04-07