

**General Data**

Model:	ALPHA V 55 M/G
Code:	2000265
Series:	Alpha V
Weight [Kg]	24.00
Submersible pump for sewage with suspended solids	

**Hydraulic**

Impeller Type:	Vortex Impeller
Delivery DN [mm]:	G 2"
Input DN [mm]:	50
Free Passage [mm]:	45
Impeller Ø [mm]:	120
Max Pump Efficiency [%]:	32.20
Global Efficiency [%]:	22.67
Head [m]:	8.59
Flow [m <sup>3</sup> /h]:	18.00

Tolerance according to ISO 9906:2012 3B2



Attention: pictures for illustrative purposes

**Features**

Upper Meccanical seal:	Lips seal
Lower Meccanical Seal:	Silicon Carbide/Ceramic/Viton
Upper Bearing:	Single raw ball bearing
Lower Bearing:	Single raw ball bearing
IP Protection:	IP68
Motor protection:	present
Humidity sensor:	not present
ATEX:	not present
Applied Paint:	Two component water-based paint
Cable Length [m]:	10
Lubricating Oil:	-
Oil Quantity [Kg]:	-

**Materials**




Pump:	Cast Iron EN 1561 EN-GJL-200
Impeller:	Cast iron EN 1561 EN-GJL-200
Motor shaft:	Stainless steel AISI 420
Cooling Jacket:	Not available
Screw:	Stainless steel A2-70
Cable:	H07RN8F

**Pumped Liquid**

Pumped Liquid:	Sewage
Density [Kg/dm <sup>3</sup> ]:	1.1
pH:	6-10
Temperature Range:	0-40°C


**Installation**

Maximum depth of immersion [m]:	20
Cooling Type:	The cooling of the motor is ensured by the surrounding liquid
Installation:	Vertical/Horizontal
Floating on board machine:	present

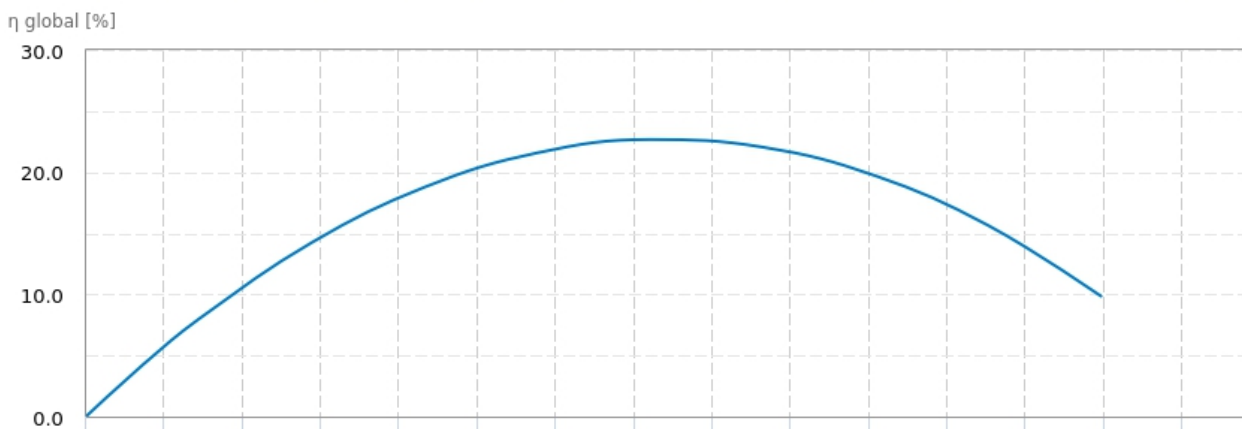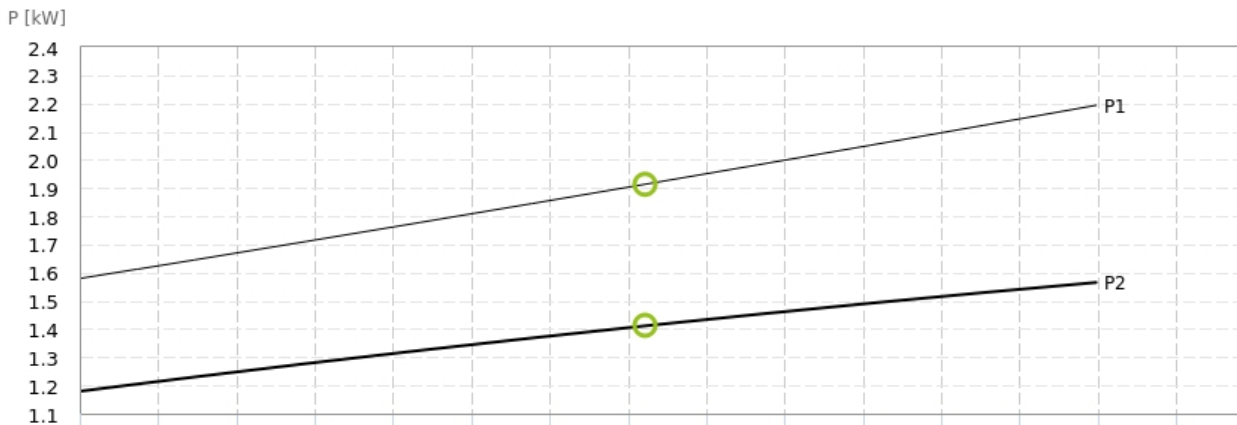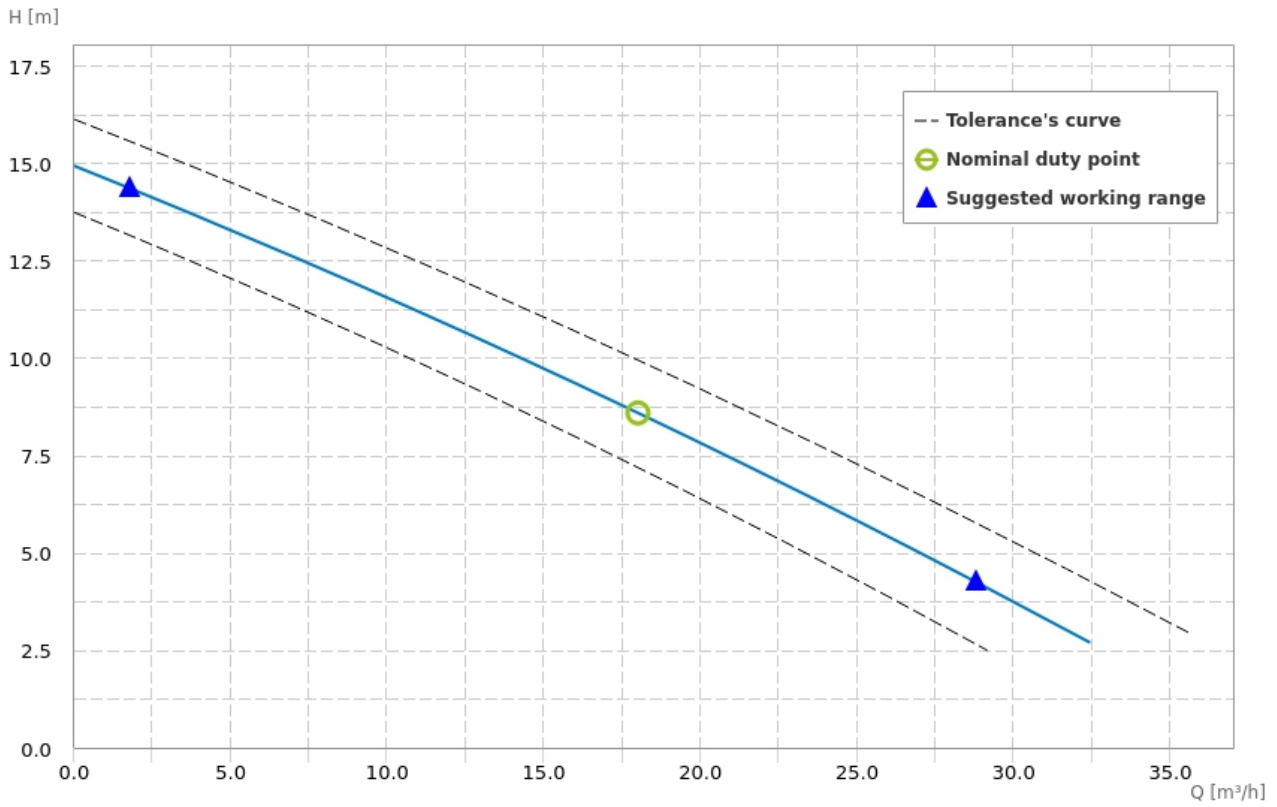

**Motor**

Motor code:	3520180220
Power P1 [kW]:	2.20
Power P2 [kW]:	1.50
Phases:	1
Frequency [Hz]:	50
Tension [V]:	230
Nominal current [A]:	9.9
Starting current [%]:	232.0
Power Factor:	0.94
R.P.M.:	2850
Starting:	D.O.L
Capacitor [ $\mu$ F]:	32.0
Insulation Class:	F 155°C
Service type:	S2
Max Efficiency [%]:	77.20
Max Efficiency at full load [%]:	68.2
Efficiency at $\frac{3}{4}$ load [%]:	69.5
Efficiency at $\frac{1}{2}$ load [%]:	70.0
Efficiency class:	-

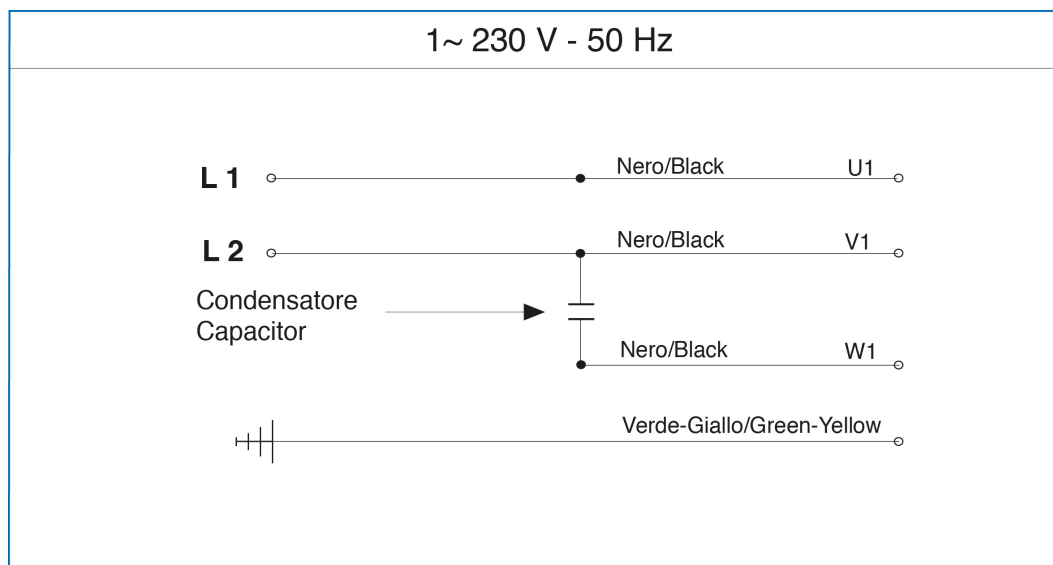**Wiring diagrams**

### Dimensions drawing

